





## 2 & 4 Hours Fire Rated Resistance

- ▶ MALAYSIAN STANDARD 1073 : PART 3 : 1996 AMD.1 : 2003 & BRITISH STANDARD 476 : PART 22 : 1987
- ▶ Maximum Fire Protection For Your Assets At Up To 4 Hours.



We Are Certified To ISO 9001:2008



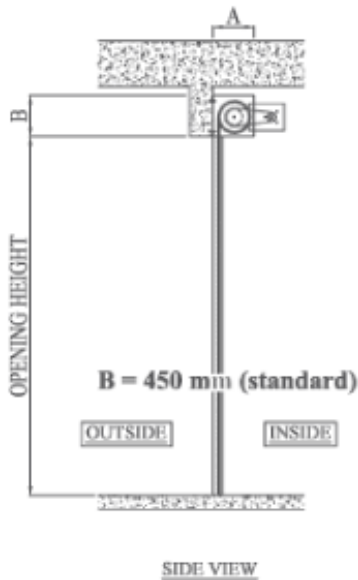


230V Single Phase Power Point

Motor

Side Guard Rail


Push Button

Wall

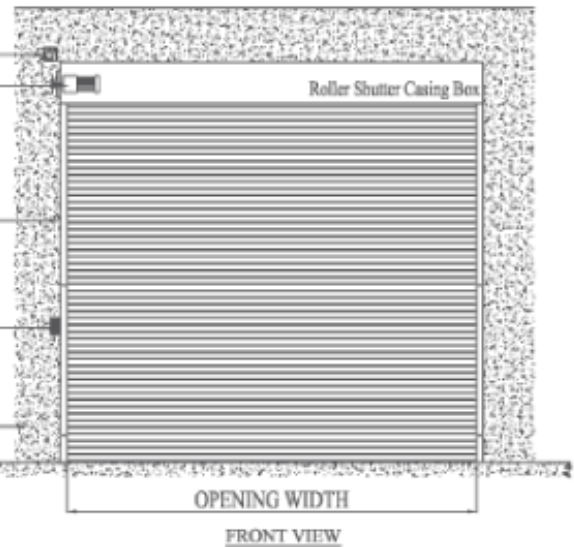


### TYPICAL MOTORISED SHUTTER FIXING TYPE


#### MOTORISED CONCEALED GUIDE RAILS

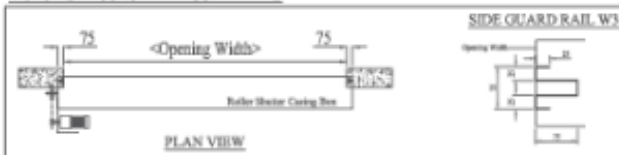


#### MOTORISED SURFACE MOUNTED GUIDE RAILS

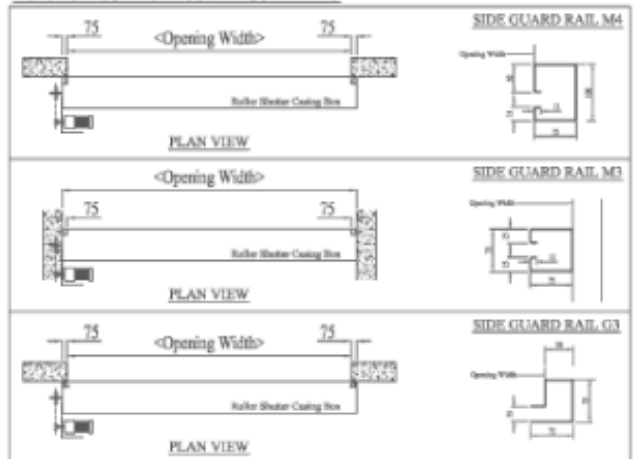

#### ZINCALUME CURTAIN LATH MODEL SELECTIONS



#### TYPICAL BOTTOM BAR MODEL SELECTIONS



### Features

- Steel construction
- Custom made and adaptable in design for site constraints

### Benefit

- Maximum protection for your assets, no failure even at 240 minutes

### Operation

- Electric operation can be powered by single phase motor
- Manual override system available
- Optional : Delay timer - shutter shall only be closed after a pre set time

### Presentation

- Galvanised as standard
- Powder coat finish